

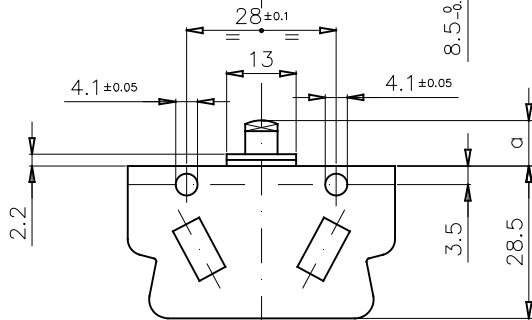






Galvanically isolated contact bridges


POSITIVE OPENING




MAX. OPERATING FORCE	N
	2,7±0,09
RELEASE FORCE	N
	1
REST POSITION	a mm
	8,8±0,25
TRIPPING POSITION	a mm
	6,6±0,35
RELEASE POSITION	a mm
	7,8±0,35
OVER TRAVEL LIMIT	a mm
	5,65

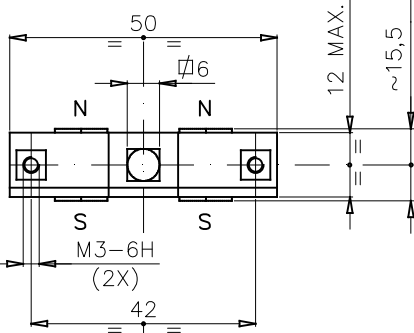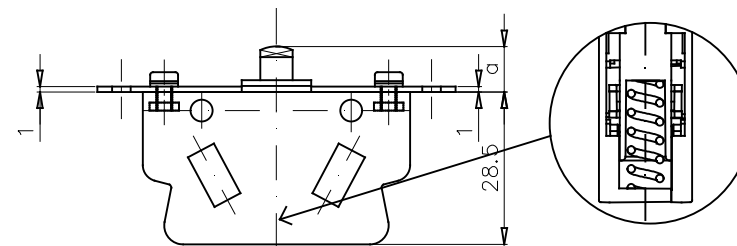

Only for Cod. SJ11PO-PNSNOBYC

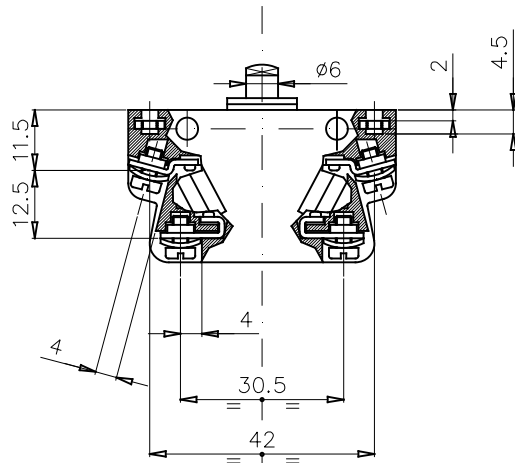

BODY

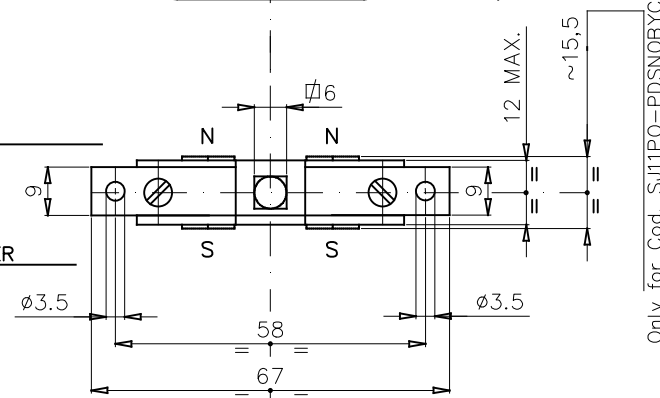

Only for Cod. S.111PO-PDSNOBYC

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ11PO-PNSNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON – STD.TYPE CONTACTS
SJ11PO-PNGNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON – GOLD PLATE CONTACTS
SJ11PO-PNSNOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 μ m GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ11PO-PDSNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON – STD.TYPE CONTACTS
SJ11PO-PDGNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON – GOLD PLATE CONTACTS
SJ11PO-PDSNOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

				MATERIALE				VEDI TABELLA				TRATTAMENTO					
	DISEGNATO	APPROVATO	VISTO C.C.	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1				SCALA		SOSTITUISCE			PESO				
DATA	01-03-24	01-03-24	01-03-24	MOLTO GROSSOLANA GROSSOLANA MEDIA FINE				1:1									
FIRMA	DESIMONE	RIZZI	RIZZI	☐	☐	☒	☐	REVISIONE	0	1	2	3	4	5	6	7	8
									DESCRIZIONE								
									SNAP-ACTION MICROSWITCH SJ11 PO (1NO + 1 NC)								
									COD.		VEDI TABELLA						
									DIS.		IP133900W						

FORMATO A3