

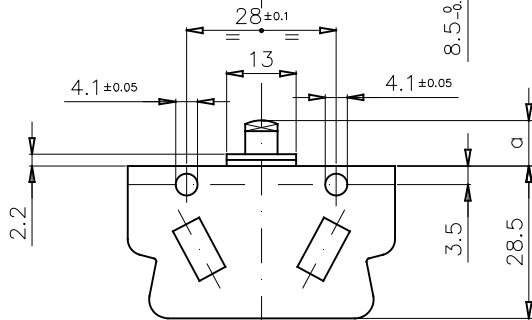






- Galvanically isolated contact bridges


POSITIVE OPENING




MAX. OPERATING FORCE	N
	$2,7 \pm 0,05$
RELEASE FORCE	N
	1
REST POSITION	a mm
	$8,8 \pm 0,2$
TRIPPING POSITION	a mm
	$6,6 \pm 0,3$
RELEASE POSITION	a mm
	$7,8 \pm 0,3$
OVER TRAVEL LIMIT	a mm
	5,65

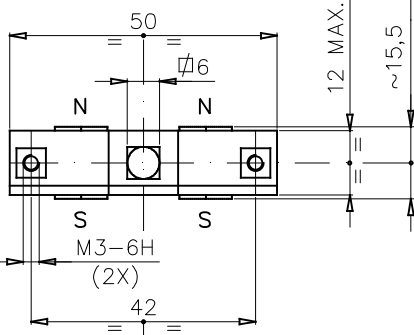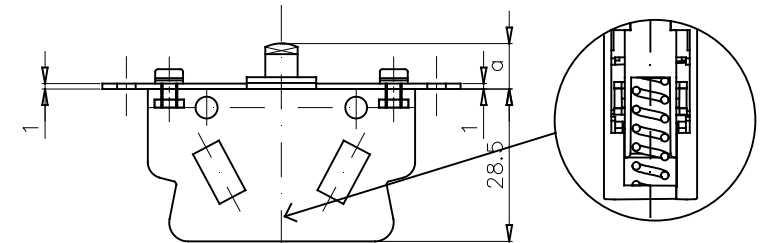

Only for Cod. SJ11PO-PNSNOBYC

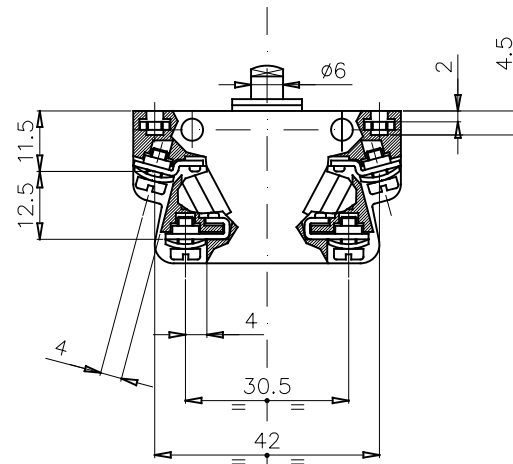

BODY

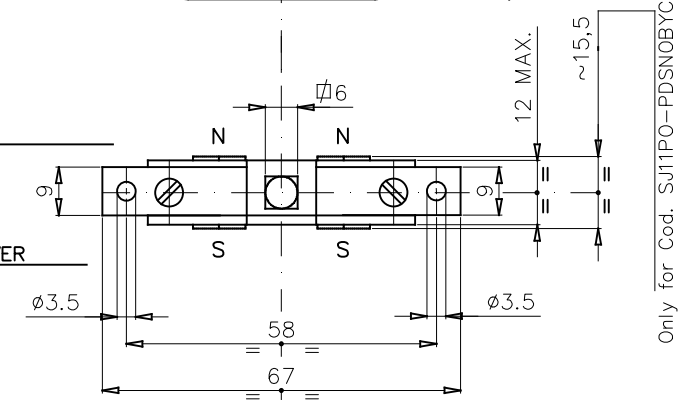

Only for Cod. SJ11PO-PDSNOBYC

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ11PO-PNSNOUY*	MICROSWITCH COMPLETE WITH PUSH BUTTON – STD.TYPE CONTACTS
SJ11PO-PNGNOUY*	MICROSWITCH COMPLETE WITH PUSH BUTTON – GOLD PLATE CONTACTS
SJ11PO-PNSNOBY*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT
THE POLARITIES ARE AS SHOWN IN THE
DRAWING

NOTE : 2 μ m GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ11PO—PDSNOUY*	MICROSWITCH COMPLETE WITH PUSH BUTTON – STD.TYPE CONTACTS
SJ11PO—PDGNOUY*	MICROSWITCH COMPLETE WITH PUSH BUTTON – GOLD PLATE CONTACTS
SJ11PO—PDSNOBY*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

				MATERIALE				VEDI TABELLA				TRATTAMENTO									
	DESEGNAO	APPROVATO	VISTO C.C.	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1						SCALA			SOSTITUISCE			PESO					
DATA	01-03-24	01-03-24	01-03-24	MOLTO GROSSOLANA GROSSOLANA MEDIA FINE						1:1											
FIRMA	DESIMONE	RIZZI	RIZZI	☐		☐		☒		☐		REVISIONE	0	1	2	3	4	5	6	7	8
				DESCRIZIONE SNAP-ACTION MICROSWITCH SJ11 PO (1NO + 1 NC)										COD.		VEDI TABELLA			F.		
														DIS.		IP133900Y				1 DI 1	

FORMATO A3