




Galvanically isolated contact bridges

POSITIVE OPENING

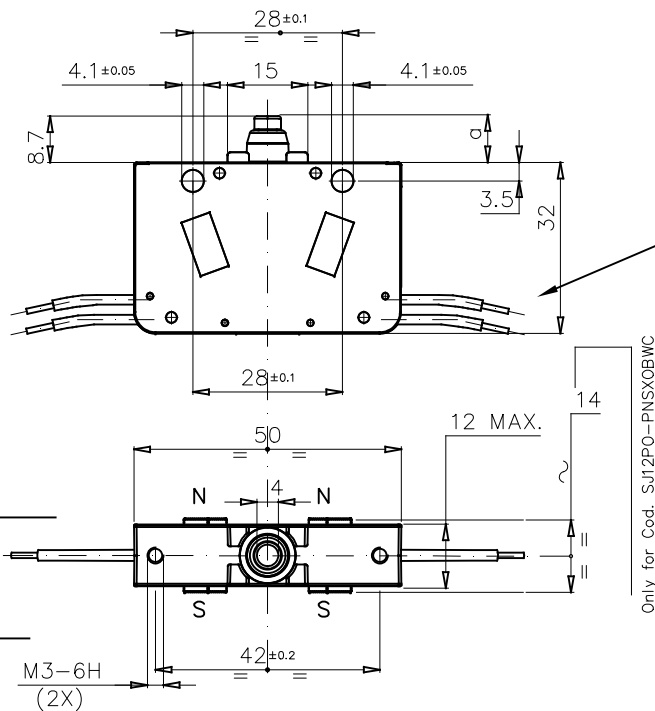

Cables length: 1 mmq x 500 mm (x4)

MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	a mm
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	a mm

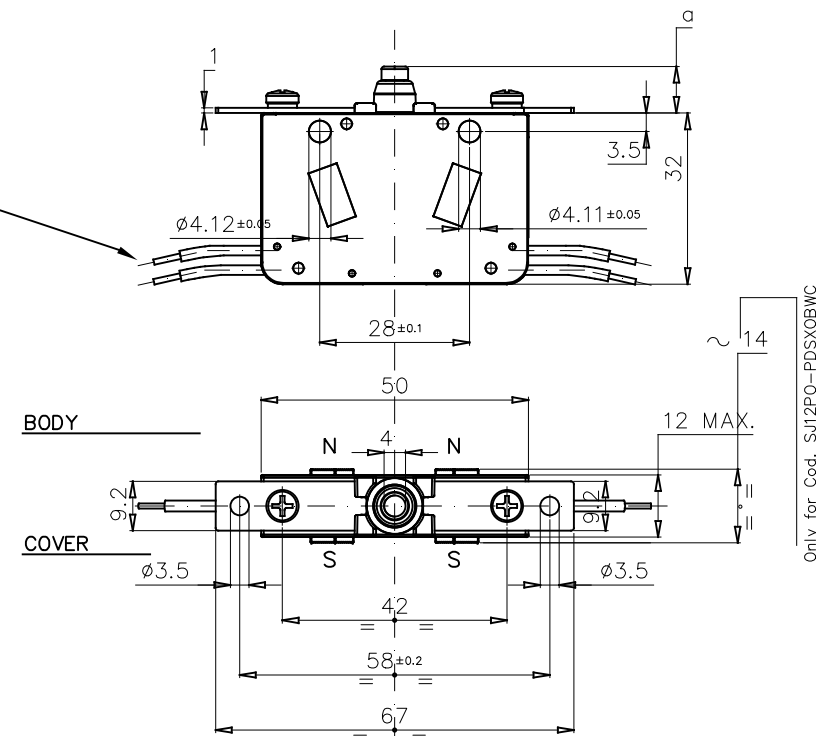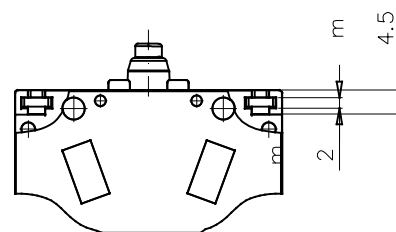

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ12PO-PNSXOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ12PO-PNGXOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ12PO-PNSXOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ12PO-PDSXOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ12PO-PDGXOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ12PO-PDSXOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA							
MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE
1	2	3	4	5	6	7	8
C.M. 0001							
19/09/24							
MU							

				MATERIALE VEDI TABELLA				TRATTAMENTO									
	DISEGNATO	APPROVATO	VISTO C.C.	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1				SCALA		SOSTITUISCE				PESO			
DATA	18/05/22	18/05/22	18/05/22	MOLTO GROSSOLANA GROSSOLANA MEDIA FINE				1:1									
FIRMA	GM	MR	MR	☐	☐	☒	☐	REVISIONE	① 2 3 4 5 6 7								
ISLEX ISOLEX Milano, Italy				DESCRIZIONE SNAP-ACTION MICROSWITCH IP67 (1NO + 1 NC) + cables 500 mm horiz.					COD. VEDI TABELLA DIS. ID10235								