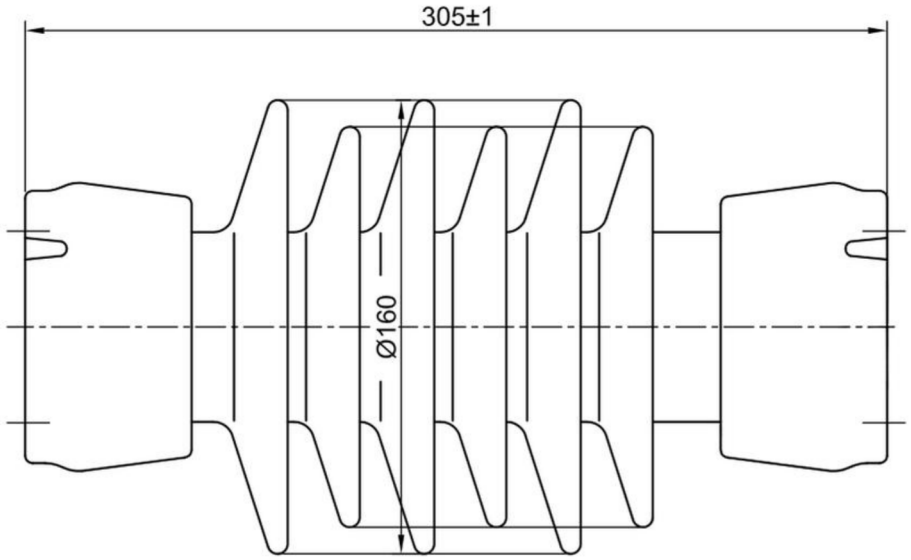

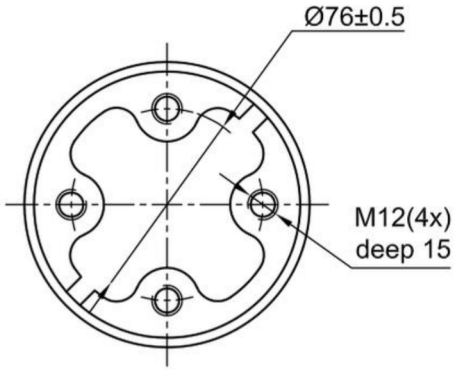

Top & Bottom View

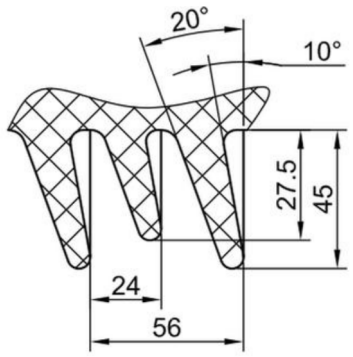

Sheds

1	Material	Porcelain		
ITEM No.	DESCRIPTION	MATERIALS	QTY	REMARK

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
Lighting Impulse Withstand Voltage	kV	125
Power Frequency Withstand voltage (wet)	kV	50
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Creepage distance min.	mm	600
Color	Brown / Grey	
Metallic Material	Galv. Ductile Iron	
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Cantilever Strenght	kN	8
Torsion strenght	kN/m	1.2
Applicable standard	IEC 60168 & IEC 60273	

Rev.	Disegnato Drawn	Approvato Approved	Data Date	Descrizione Description
01	–	–	--/-/--	

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768–1 grado: ☐ Fine ☒ Medium ☐ Coarse ☐ Molto grossolana Very coarse
Quotes (mm) without any tolerance indication are according to UNI EN 22768–1 std's:

Disegno di proprieta della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX

N. Ordine P. Order	Data Date	Disegnato Drawn AT	Data Date 12/02/26	Scala Scale 1:1	
Cliente Customer	Data Date	Approvato Approved RIZZI	Data Date 12/02/26	Revisione Revision	1 2 3 4 5 6
Conferma Acknowledg.	–	Controllato Checked	File Disk ID10491	Codice Code TABLE	A4

ISOLEX
ISOLEX Milano Italy

Descrizione – Description

Station Post insulator C8–125–600

Foglio Sheet 1 di of 1

Disegno N. – Dwg. No. ID10491

ACAD