



HP021019

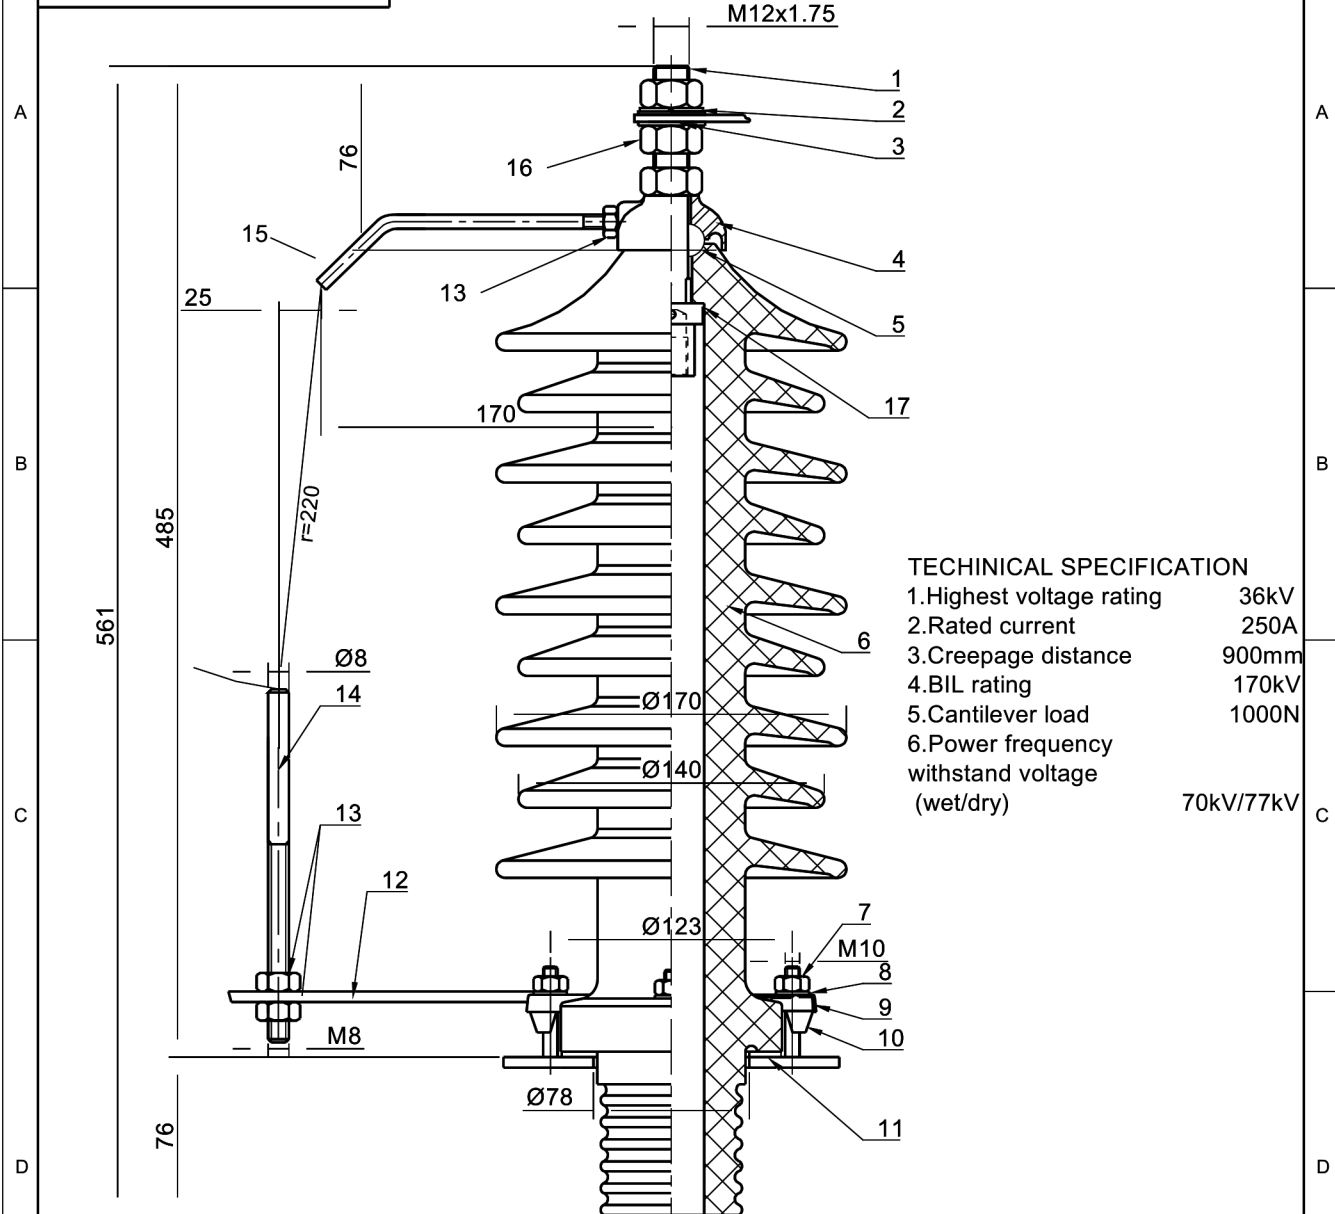

TECHNICAL SPECIFICATION

1. Highest voltage rating	36kV
2. Rated current	250A
3. Creepage distance	900mm
4. BIL rating	170kV
5. Cantilever load	1000N
6. Power frequency withstand voltage (wet/dry)	70kV/77kV

M12x1,75

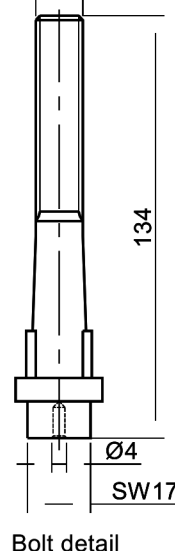

17	Internal gasket	Press board	1	10	Clamping	Aluminium alloy	4
16	Nuts	Brass	3	9	Fixing ring	Stainless steel	1
15	Arcing horn(Top)	Stainless steel	1	8	Washer	Stainless steel	4
14	Arcing horn(Bottom)	Stainless steel	1	7	Nut M10	Stainless steel	4
13	Nut M12	Stainless steel	3	6	Bushing body	Porcelain	1
12	Arcing support	Stainless steel	1	5	Ring Gasket	NBR	1
11	Flange gasket	NBR	1	4	Cover	Brass	1
				3	Washer	Brass	2
				2	Spring Washer	Stainless steel	1
				1	Conductor rod	Brass	1
ITEM NO	DESCRIPTION	MATERIALS	QTY	ITEM NO	DESCRIPTION	MATERIALS	QTY

Material	Weight			Drawing No.		
Porcelain				ID10514		
	Date	Name		UNIT	SCALE	COLOUR
Drawn	2021-06-01			mm	NTS	Brown
Checked			Title	30NF630A-1080mm (DIN 42531)		
Approved						